


1 Remove RPLATE



Remove the two rubber grommets covering the screws. Set them aside for re-installation.

Tip: Use a toothpick to gently lift the grommets.

Use a RPLATE Torx 20 tool to remove the RPLATE screws. One was included with your RPLATE purchase.



Lift the RPLATE from the bottom to release it from the bracket tabs.

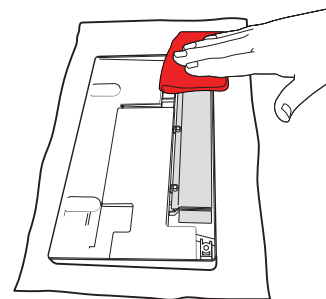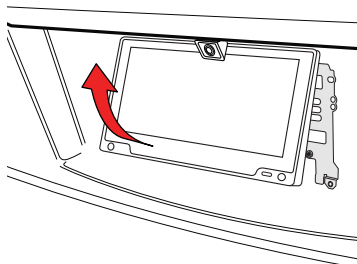


Place a cloth down on a flat surface, and lay your RPLATE face down on top.


Wipe the back of the RPLATE with a damp cloth to remove dust and dirt.

2 Replace Battery

Use the RPLATE Torx 20 tool to remove the three silver screws. Set them aside.

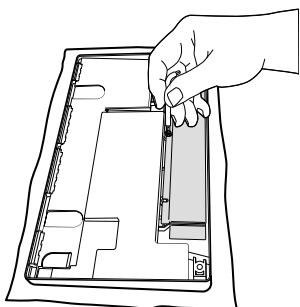


Remove the battery cover, being careful not to bend the tabs.

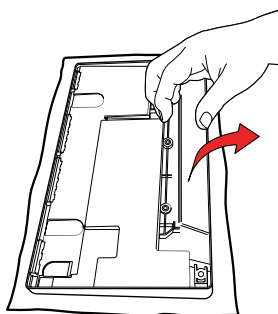


Note how the battery is positioned in the RPLATE.

Gently pull the battery out just enough to see the connector.

Caution: Don't pull on the wires.

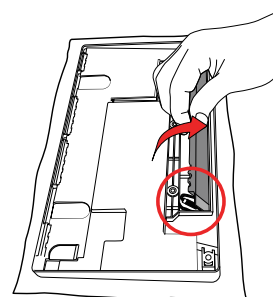


Press the black release tab and disconnect the white battery connector. Set the old battery aside.




Carefully align the new battery's connector and press it into place until secure.

Note: Connectors only fit in one direction.




2 Replace Battery (continued)

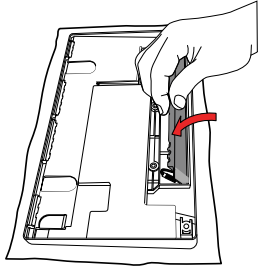

Place the new battery in the housing with "This Side Up" label facing up and tuck the wires underneath.


Insert the metal cover tabs into the housing, then align the cover over the screw holes.

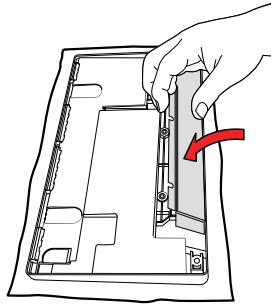

Hold the cover in place and loosely insert one screw with the RPLATE Torx 20 tool.


Loosely insert the second and third screws.

Tighten all three screws evenly to seal the cover.

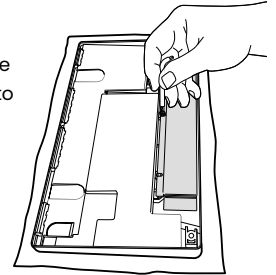


3 Reinstall RPLATE

Wipe the metal bracket with a damp cloth.

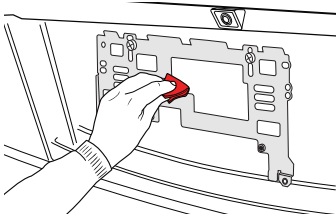


Slide the RPLATE back onto the bracket. The slots should catch the top tabs.

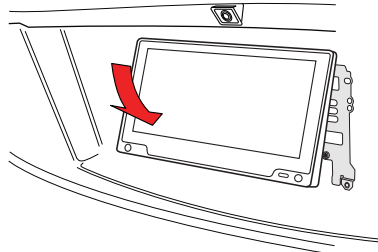

Make sure the RPLATE sits flush with the bracket.

Reattach the bottom using the black screws and grommets from Step 1.

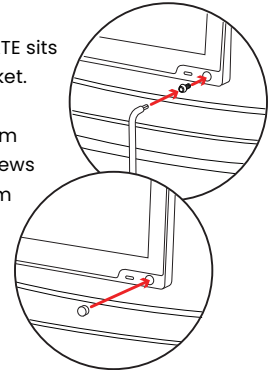

4 Finalize In-App

After reinstalling your RPLATE, open the Reviver mobile app.

You should see a message that says **"RPLATE Detached from Vehicle"** with a button labeled **"Authorize."**

Tap Authorize to reconnect your RPLATE. This will complete the battery replacement and clear any battery-related alerts.

If this message does not appear, continue to the troubleshooting steps.




5 Troubleshooting

If the 'Battery Replacement Needed' message still appears and you do not see an option to authorize your plate in the app:

Locate the 'Home' button on the front of your RPLATE in the lower right corner.

Press and hold the Home button for 10 seconds, then release.

This forces the plate to sync with Reviver's server and should clear the message.

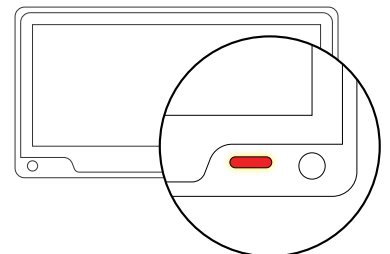

Recycle the old battery according to local or state guidelines for lithium batteries.



Monday – Friday
9am – 5pm Pacific
1 (844) 697-7528
Email: support@reviver.com